


TYPE 883C PRINTER: AUTOMATIC

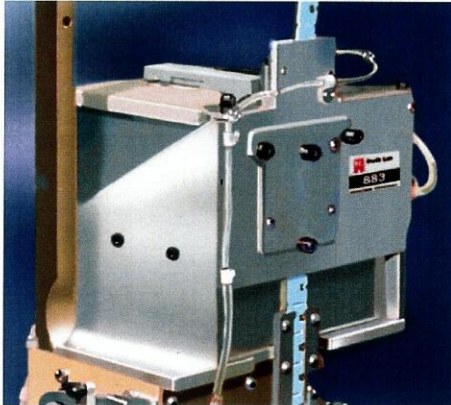

Designed for use with Kwik Lok's 872 Encore and 872XLS Automatic Bag Closing Machines. The 883C Printer is a programmable thermal transfer printer manufactured by Markem Corporation.

The Printer will print medium duty 'NRP' webbed Striplok Closures (Note: Cannot be used with closers that run closure-labels). Refer to Print Area Specifications.

The Printer can be field installed on the 872 Closer. The closer lok track needs to be shortened and the closer electrical box requires reworking prior to mounting the Printer.

SPECIFICATIONS

Refer to the specification chart for complete specifications and available options.

APPROXIMATE SHIPPING WEIGHT AND DIMENSIONS

30.5" x 24.5" x 19.5"; 54 lbs.; 8.4 Cu. Ft.
77.5 cm x 62.2 cm x 49.5 cm; 22.5 Kg; 0.24 cu. m

ORDERING INFORMATION

Refer to the specification chart and determine the following:

- A. TYPE:
 1. 883C (SmartDate 3i)
- B. MODEL:
 1. Select Model A for adapter kit (for fitting to the 872 Closer) with SmartDate.
 2. Select Model B for adapter kit without SmartDate (customers that have existing SmartDate Printers).
 3. Select flow direction. (R = Right Hand, and L = Left Hand). Must match hand of closer the printer will be mounted on.
- C. CABLE SET:
 1. Select 1.5 meter cable if printer controller is located on or near Closer.
 2. Select 3.0 meter cable if printer controller is located away from Closer.
- D. IN-FIELD INSTALLATION REQUIREMENT:

If mounting the printer to an in-field Closer (versus ordering a new closer with printer), specify the type of reel mast.

 1. Rearward facing - for reel location located over the closer.
 2. Forward facing - for reel location located over the conveyor.

Example Order:

Type 883C, Model AR with 1.5 meter cable.

OPTIONS:

- Z8083004 Kit-mount-control box
- P37-00007 Beacon-ribbon fault
- P37-00022 Ethernet adapter
- P37-00041 Software - Colos - Network
- P37-0042 Software - Colos - Stand alone
- P37-0037 Adapter - cable - USB to serial

TYPE	MODEL	FLOW DIRECTION	CLOSURE	SPEED	VOLTAGE	PRINTER
883C	A	R or L	J-NRP, JM-NRP	REFER TO MANUAL	115/230VAC 50/60 Hz	SmartDate 3i®
883C	B		JW-NRP, VW-NRP			

PRINT AREA SPECIFICATIONS

The printer is capable of printing to within 1.59mm from the edge of the closure and/or closure opening.

