


TYPE 883E PRINTER: AUTOMATIC

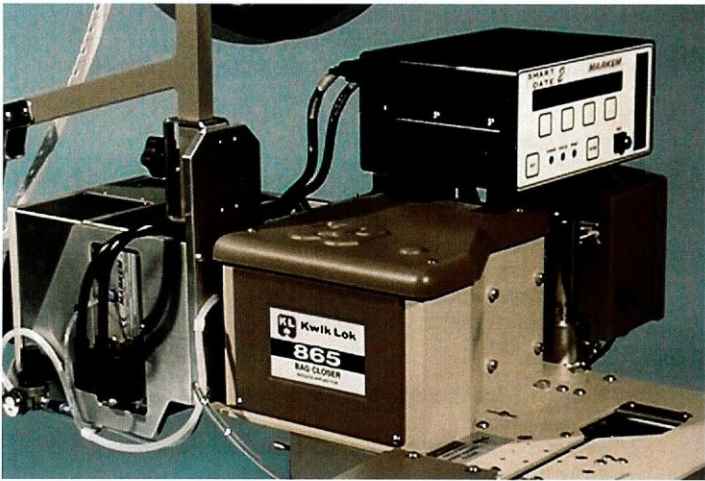

Designed for use with Kwik Lok's 865A Automatic Bag Closing Machine. The Type 883E Printer is a programmable thermal transfer printer manufactured by Markem Corporation.

The Printer is limited to the use of medium duty closures and will not print on closure-labels. Refer to the following Print Area Specifications.

The Printer can be field installed on the 865 Closers. Reworking of the closer lok track, pick shaft assembly and electrical box are required prior to mounting the Printer.

SPECIFICATIONS

Refer to the specification chart for complete specifications and available options.

APPROXIMATE SHIPPING WEIGHT AND DIMENSIONS

30.5" x 24.5" x 19.5"; 54 lbs.; 8.4 Cu. Ft.
77.5 cm x 62.2 cm x 49.5 cm; 24.5 Kg; 0.24 cu. m

ORDERING INFORMATION

Refer to the specification chart and determine the following:

- A. TYPE:
 1. 883E (SmartDate 3i)
- B. MODEL:
 1. Select Model A for adapter kit (for fitting to the 865 Closer) with SmartDate.
 2. Select Model B for adapter kit without SmartDate (customers that have existing SmartDate Printers).
 3. Select flow direction. (R = Right Hand, and L = Left Hand) Must match hand of closer the printer will be mounted on.
- C. CABLE SET:
 1. Select 1.5 meter cable if printer controller is located on or near Closer (standard).
 2. Select 3.0 meter cable if printer controller is located away from Closer.
- D. TYPE OF INSTALLATION:
 1. Specify vertical packaging (bag length perpendicular to floor).
 2. Specify horizontal packaging (bag length horizontal to floor).
- E. IN-FIELD INSTALLATION REQUIREMENT:

If mounting the printer to an in-field Closer (versus ordering a new closer with printer), specify the type of reel mast.

 1. Single closure reel mast.
 2. Dual closure reel turret mast.

Example Order:

Type 883E, Model AR with 1.5 meter cable, for closing vertical packages.

OPTIONS:

- P37-00007 Beacon-ribbon fault
- P37-00022 Ethernet adapter
- P37-00041 Software - Colos - Network
- P37-0042 Software - Colos - Stand alone
- P37-0037 Adapter - cable - USB to serial

TYPE	MODEL	FLOW DIRECTION	CLOSURE	SPEED	VOLTAGE	PRINTER
883E	A	R or L	J-NRP, JM-NRP	REFER TO MANUAL	115/230VAC 50/60 Hz	SmartDate 3i®
883E	B		JW-NRP			

PRINT AREA SPECIFICATIONS

The printer is capable of printing to within 1.59mm from the edge of the closure and/or closure opening.

