


TYPE 883G PRINTER: AUTOMATIC

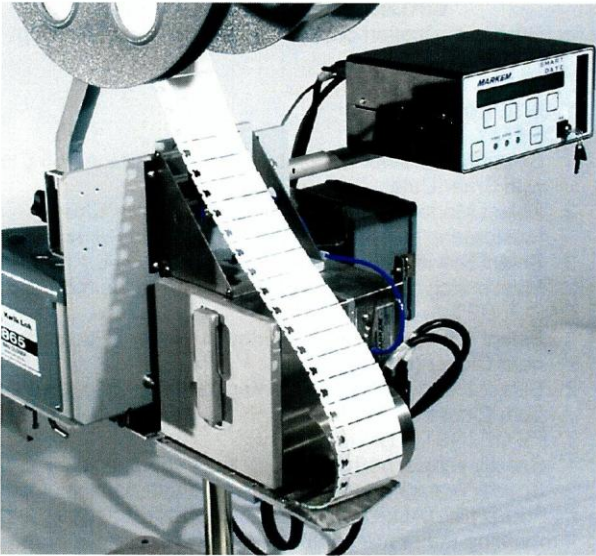

Designed for use with Kwik Lok's 865A Automatic Bag Closing Machine. The Type 883G Printer is a programmable thermal transfer printer manufactured by Markem Corporation.

Printing will be on the closure-label. Refer to the following Print Area Specifications.

The Printer can be field installed on the 865 Closer. The closer lok track needs to be shortened prior to mounting the Printer.

SPECIFICATIONS

Refer to the specification chart for complete specifications and available options.

APPROXIMATE SHIPPING WEIGHT AND DIMENSIONS

30.5" x 24.5" x 19.5"; 54 lbs.; 8.4 Cu. Ft.
77.5 cm x 62.2 cm x 49.5 cm; 22.4 Kg; 0.24 cu. m

ORDERING INFORMATION

Refer to the specification chart and determine the following:

- A. TYPE:
 1. 883G (SmartDate 3i)
- B. MODEL:
 1. Select Model A for adapter kit (for fitting to the 865 Closer) with SmartDate.
 2. Select Model B for adapter kit without SmartDate (customers that have existing SmartDate Printers).
 3. Select flow direction. (R = Right Hand, and L = Left Hand). Must match hand of closer the printer will be mounted on.
- C. CABLE SET:
 1. Select 1.5 meter cable if printer controller is located on or near Closer.
 2. Select 3.0 meter cable if printer controller is located away from Closer.
- D. SPECIFY CLOSURE-LABEL:

The closure-label must match that of the 865 Closer on which the Printer is to be mounted.
- E. IN-FIELD INSTALLATION REQUIREMENT:

If mounting the printer to an in-field Closer (versus ordering a new closer with printer), specify the type of reel mast.

 1. Single closure-label reel mast.
 2. Dual closure-label reel turret mast.


Example Order:

Type 883G, Model AR with 1.5 meter cable. Printing on a Series TF Closure-Label (Model KNRP Closer).

OPTIONS:

P37-00008 Mount-controller
 P37-00007 Beacon-ribbon fault
 P37-00041 Software - Colos - Network
 P37-00042 Software - Colos - Stand alone
 P37-00037 Adapter - cable - USB to serial
 P37-00022 Ethernet adapter
 Z8083007 R Kit-lok sensor
 08-005716 Bracket - Box extension (required if using P37-00008 Mount and Kwik Lok Type 887 Stand)

TYPE	MODEL	FLOW DIRECTION	CLOSURE	SPEED	VOLTAGE	PRINTER
883G	A	R or L	PFM or TFM	REFER TO MANUAL	115/230 VAC 50/60 HZ	SmartDate 3i®
883G	B		PF or TF			

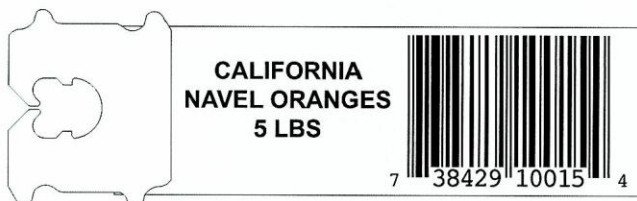

Series PF
(Right Hand)



Series PFM
(Left Hand)