

TYPE 088A

SEMIAUTOMATIC BAG CLOSING MACHINE



The 088A Semiautomatic Bag Closing Machine closes bagged packages with the regular all-plastic bag closures and can also use Kwik Lok's colorful closure-labels. Three basic label sizes are available: Series TF and TFM (2-3/4" x 2-3/4") (7 cm x 7cm), Series PF and PFM (2-3/4" x 7/8") (7cm x 2.22 cm), CFJ (2-1/4" x 1-15/16") (5.72 cm x 5 cm). Optional reel assemblies are required when running labels.

When using the 884 Thermal Printer, the packager can print bar codes and other packaging information on the Series P-200 and PFM-200 (2-3/4" x 7/8") (7 cm x 2.22 cm) or Series T-220 and TFM-220 (2-3/4" x 2-3/4") (7 cm x 7 cm). These closure-labels can be rewound and run in the 088A.

SPECIFICATIONS

HEIGHT: (maximum) 38" (96cm)
 WIDTH: 13" (33cm)
 LENGTH: 22" (56cm)

APPROXIMATE SHIPPING WEIGHT & DIMENSIONS WITHOUT PRINTER

30" x 24" x 20"; 45 Lbs; 8.4 Cu. Ft.
 76cm x 61cm x 51cm; 21Kg; 0.24 Cu.M.

WITH PRINTER

38" X 24" X 20"; 65 Lbs, 10.6 Cu. Ft.
 97cm x 61cm x 51cm; 30 Kg, 0.30 cu m


TYPE	MODEL DESIGNATION			PRINTER	CLOSURE (LABELS)	PACKAGE WEIGHT	SPEED (Bags/Min)
	PREFIX	CLOSURE	FLOW				
088A	A	K-NRP	R OR L	NO	Series J-NRP, K-NRP (CFJ, PF, TF, P-200, T-220)	UP TO 5 LBS (2.3 Kg)	50
088A	A	KM-NRP		NO	Series JM-NRP, KM-NRP (PFM, TFM, PM-200, TM-220)		
088A	AP	K-NRP		YES	Series J-NRP, K-NRP (CFJ, PF, TF, P-200, T-220)		
088A	AP	KM-NRP		YES	Series JM-NRP, KM-NRP (PFM, TFM, PM-200, TM-220)		

ORDERING INFORMATION

Refer to the specification table and determine the following:

- A. Type:
088A Closer only (A)
088A Closer with Printer (AP)
- B. Model:
1. Select closure. Note closure and closure-labels each model can use.
2. Select Flow Direction (R = Right Hand; L = Left Hand)
- C. Specify electrical requirements:
110 VAC, 50/60 Hz, 1.0A, 1 Ph
115 VAC, 60 Hz, 1.0A, 1 Ph
230 VAC, 50/60 Hz, 0.5A, 1 Ph
- D. Specify reel assembly (closure, closure-label, or both).
- E. If 088AP (printer) is selected:
1. Select printer anvil(s)
08-001249 Anvil - J, K & TF
08-001252 Anvil - J, K, & PF
08-001331 Anvil - JM & KM
08-001332 Anvil - PFM
08-001339 Anvil - TFM
2. Specify masterplate part number and closure series. Refer to 088A print layouts.

Example Order: 088AP Model K-NRPR, 115 VAC, 60hz, closure reel 08-001249 anvil, 08-001907 masterplate, J-NRP closures

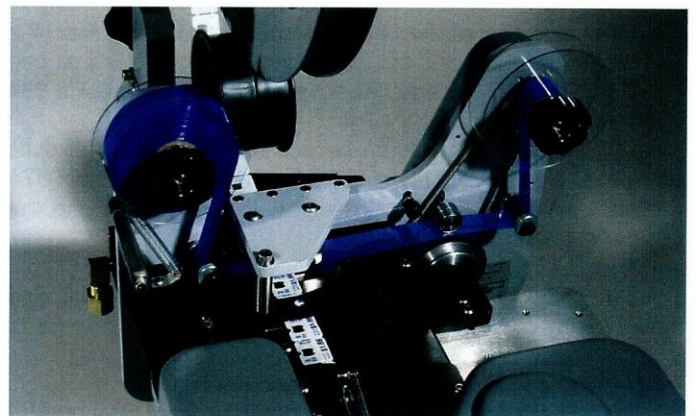

PRINTER REQUIREMENTS

Air Volume and Pressure: 1.5SCFM at 120 psi (6 liters/min at 8 BAR)


Maximum Air Pressure: 150 psi (10 BAR)

Printing Supplies: Order separately from your type supplier. Kwik Lok recommends CODEMARK® products.

Optional: Z8095001 Typeholder remover kit.

TYPE 088A SEMI-AUTOMATIC BAG CLOSING MACHINE

088A PRINT LAYOUTS

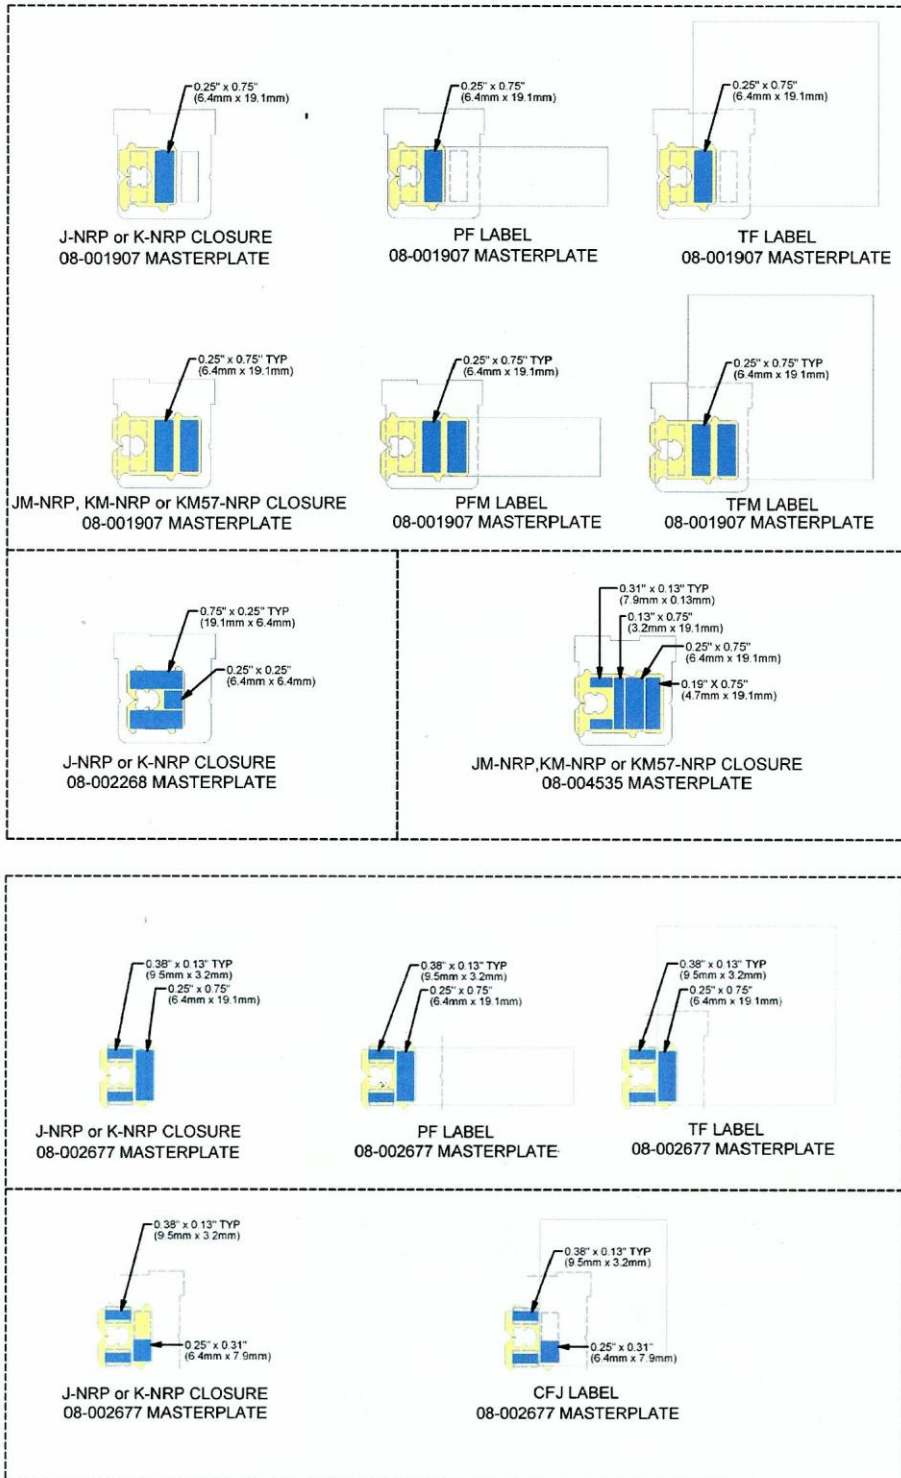

Each of the above enclosed areas represents a single combined closure series with masterplate.

Floor Stand for the 088A Bag Closing Machine
PART NUMBER: Z0088014



Conveyor can only be used with the right hand (R) 088A

OPTIONAL BAG TRIMMER

As an option, Kwik Lok offers a bag neck trimmer with the 088A. The trimmer is detachable; snapping on and off easily. The trimmer trims the bag neck approximately 1-1/4" (3.2 cm) above the closure while the bag is being closed with the 088A machine.

Order Part Number:
Z0088009R Bag Neck Trimmer

